



Type SCH50IB

- Hollow Shaft Encoder - \varnothing 50 mm
- Through Hollow Bore: \varnothing 3/8 in to \varnothing 16 mm
- Resolution up to 9.000 ppr
- IP 65 (IP 66, 67 option)
- Formerly named 2RHIB

Electrical Specifications

Code:	Incremental
Resolution:	1 to 9000 ppr (pulses per revolution)
Supply Voltage:	4,5 Vdc min. to 30 Vdc max. ** (45 mA max. - no load)
Output Voltage:	Low: 500 mV max. at 10 mA High: ($V_{in} - 0,6$) at -10 mA ($V_{in} - 1,3$) at -25 mA
Output Current:	30 mA max. load per output channel **
Frequency Response:	300 kHz max. **
Output Format:	Two channel (A, B) quadrature with Index (Z) and optional complementary (A-, B-, Z-) outputs
Phase Sense:	A leads B clockwise (CW) from the mounting end of the encoder
Index:	Gated with Channels A and B high
Accuracy:	+/- 0,8 arc-min.
Outputs:	ASIC Push pull and Differential OL7272 Push-pull and Differential Line Driver 26C31 Differential Line Driver 5V output (with 5V input)
Electrical Protection:	Reverse polarity and output short circuit protected
Noise Immunity:	Tested to EN61000-6-2 : 2005 (industrial environments) Electromagnetic compatibility (EMC) and EN 61000-6-3 : 2007 (residential, commercial, and light- industrial environments) for Electromagnetic compatibility (EMC)

Mechanical Specifications

Material:	Housing: Aluminum Cap: Aluminum Hollow Shaft: Brass
Weight:	Encoder: ~ 190 gr (6,7 oz) Cable: 60 gr / meter (2,12 oz / meter)
Bearing Life:	> $1,9 \times 10^{10}$ revolutions at rated load
Shaft Speed:	4.500 rpm (max. sustained) IP 65 3.000 rpm (max. sustained) IP 66 / IP 67
Starting Torque:	< 0,02 Nm (2,83 oz-in) at 25° C
Mass Moment of Inertia:	6,0 gcm ² ($8,5 \times 10^{-5}$ oz-in-sec ²)
Hollow Shaft Loads:	Axial: 50 N (11,24 lbs) max. Radial: 50 N (11,24 lbs) max.

Environmental Specifications


Operating Temp.:	-40° to +85° C
Storage Temp.:	-40° to +85° C
Shock:	100 G / 11 ms
Vibration:	10-2000 Hz / 10 G
Bump:	10 G / 16 ms (1000 x 3 axis)
Humidity:	98 % RH without condensation
IP Rating:	IP 65 / Nema 5 (approx.) IP 66 / Nema 6 (approx.) option IP 67 / Nema 6 (approx.) option

Connection Options

Cable:	8 leads (0,14 mm ² , 26 AWG) twisted pairs; shielded
Connector:	5-pin M12 8-pin M12 9-pin M23 12-pin M23

** = It is recommended user not to combine max. values for all 3 parameter

Output waveform

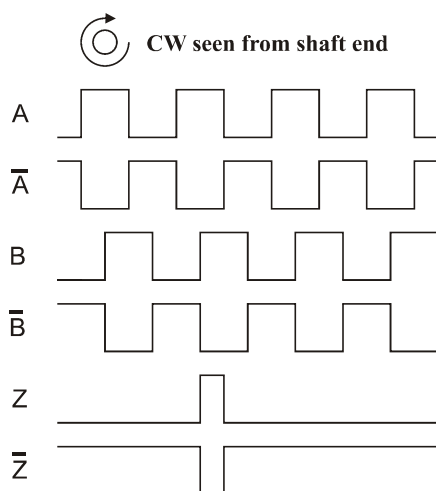

Channel tolerance $180\text{ e}^\circ \pm 36\text{ e}^\circ$
 Phase difference tolerance $90\text{ e}^\circ \pm 18\text{ e}^\circ$
 Z channel tolerance $90\text{ e}^\circ \pm 18\text{ e}^\circ$



Disk Resolutions (Pulses per revolution)

1	32	125	720	3000
2	36	150	800	3072
5	40	180	1000	3600
6	45	200	1000	4000
7	47	250	1024	4096
8	50	256	1131	5000
10	60	300	1200	8192
12	64	360	1250	9000*
15	70	400	1270	
16	75	455	1500	
18	80	500	2000	
20	90	512	2048	
25	100	600	2400	
30	120	635	2500	

Other options on request
 Pulses per revolution,
 min. 1 – max. 9.000



* Operating temperature: -20°C to 50°C

Mechanical Dimensions

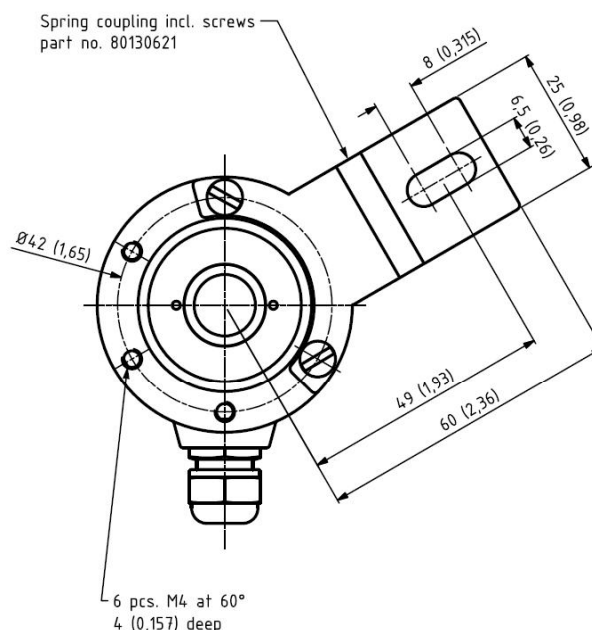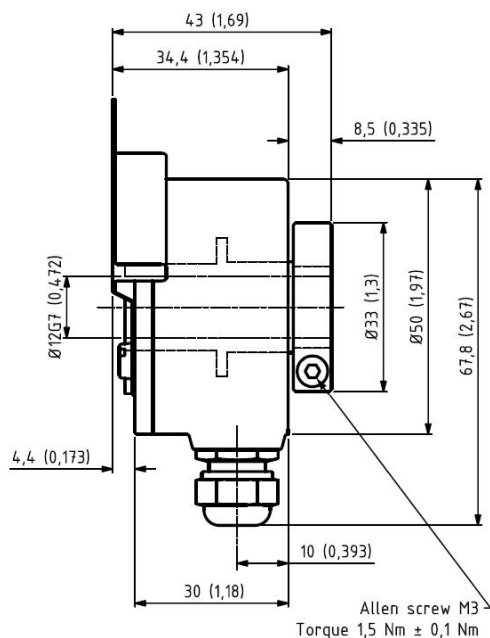



Standard Cable Gland
 Side (S)

mm (inches)

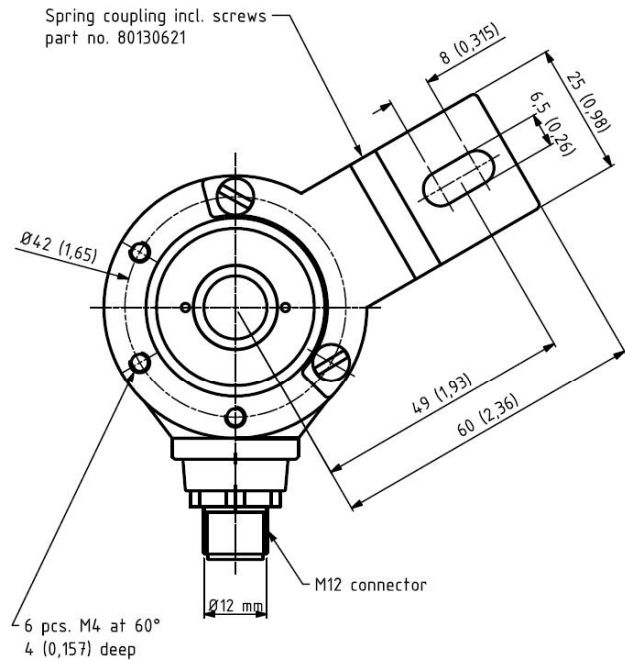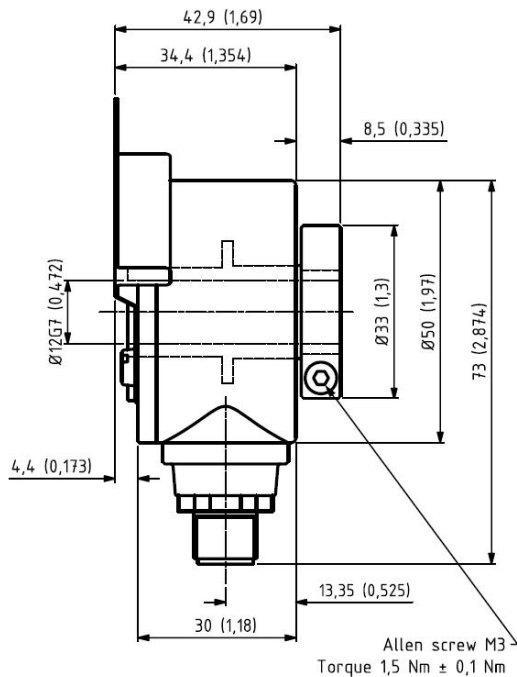

M12 Connector


mm (inches)

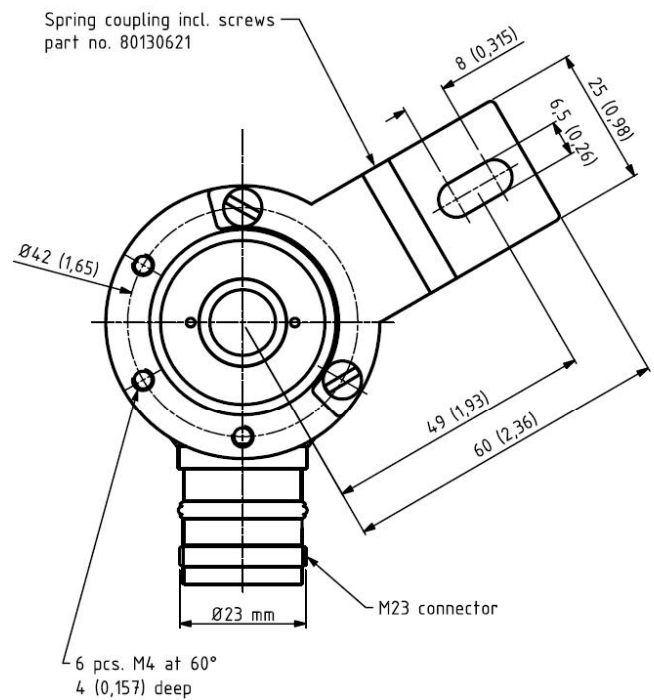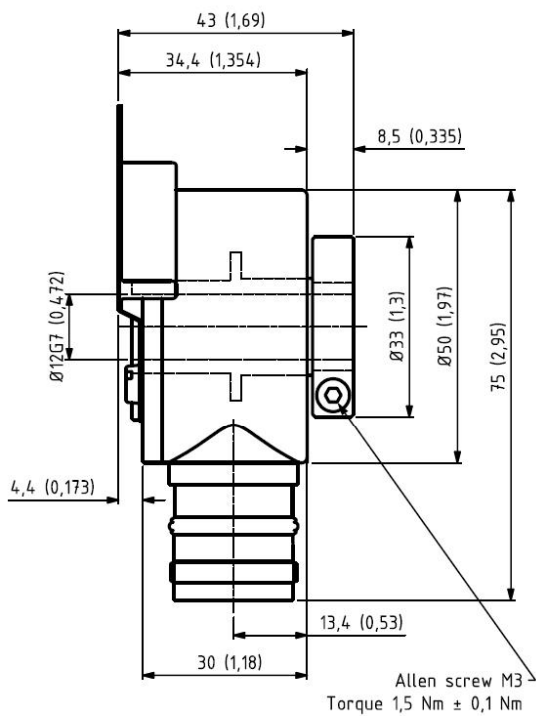

M23 Connector

mm (inches)

Output Terminations

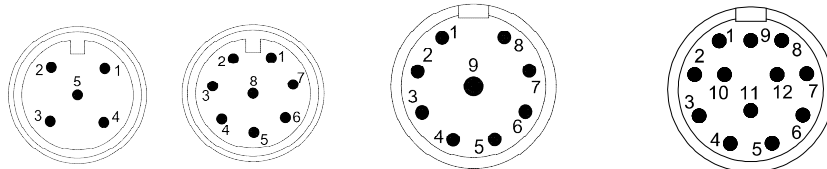

Channel	Standard Cable		Pin	M12	M12	M23	M23	M23	M23
	Standard Output	Differential Output		5 - pin	8 - pin	9 - pin	9 - pin	12 - pin	12 - pin
				Standard Output	Differential Output	Standard Output	Differential Output	Standard Output	Differential Output
	Wire Color			Channel	Channel	Channel	Channel	Channel	Channel
A	Pink	Pink	1	Vsup	A	A	A	GND	B -
A -	Gray*	Gray	2	B	Vsup	B	B	NC	NC
B	Green	Green	3	GND	A -	Z	Z	Z	Z
B -	Yellow*	Yellow	4	A	B	GND	A -	GND	Z -
Z	White	White	5	Z	B -	GND	B -	A	A
Z -	Brown*	Brown	6		Z	GND	Z -	GND	A -
Vsup	Red	Red	7		GND	Vsup	Vsup	NC	NC
GND	Blue	Blue	8		Z -	GND	GND	B	B
			9			Shield	Shield	Shield	Shield
			10					GND	GND
			11					NC	NC
			12					Vsup	Vsup

GND = Circuit Ground

* Internally connected as GND

GND = Circuit Ground

Shield = Case Ground

Ordering Code

Example: SCH50IB – 1024 – D – 12 – 43 – 65 – 01 – S – 00 – S1

SCH50IB - [] - [] - [] - 43 - [] - [] - S - [] - []

Pulses per Revolution

See table

Standard	N
Standard – Open Collector NPN	NON
Standard – Open Collector PNP	NOP
Differential	D
26C31 Line Driver 5V / 5V only	L
OL 7272 Line Driver	M

Output

Hollow Shaft Dia.

Hollow Shaft Length

10 mm x 43 mm	10	-	43
12 mm x 43 mm	12	-	43
14 mm x 43 mm	14	-	43
15 mm x 43 mm	15	-	43
16 mm x 43 mm	16	-	43
3/8 in x 43 mm **	3/8	-	43
1/2 in x 43 mm **	1/2	-	43
5/8 in x 43 mm **	5/8	-	43

** May incur longer delivery time

IP Rating

IP 65	65
IP 66*	66
IP 67*	67

Standard is 1 meter	01
Specify length	XX
No Cable	00

Cable Length

Cable Takeout

<u>Cable</u>	
Side radial	S
<u>Connector</u>	
Side radial	S

Connector

M12 5-pin	P5
M12 8-pin	P8
M23 9-pin	C9
M23 12-pin	C12
No Connector	00

Spring Coupling

1 hole p/n 80147042	S1
1 hole p/n 80131035	S2
1 hole p/n 80130621	S3
2 holes p/n 80149823	S4
3 holes p/n 80149764	S5
4 holes p/n 80131333	S6
2 holes p/n 80149662	S7
No spring coupling	00

See Accessories for drawings

Other options on request:
Please contact Scancon A/S

* Encoder total length is 47.8 mm
for IP 66 and IP 67 options