



## Type SCH50F

- Hollow Shaft Encoder -  $\varnothing$  50 mm
- Hollow Bore:  $\varnothing$  6 mm to  $\varnothing$  8 mm
- Resolution up to 12.500 ppr
- IP 65 (IP 66 or IP 67 options)  
Environmental Protection
- Formerly named 2RHF

### Electrical Specifications

<b>Code:</b>	Incremental
<b>Resolution:</b>	1 to 12.500 ppr (pulses per revolution)
<b>Supply Voltage:</b>	4,5 Vdc min. to 30 Vdc max. ** (35 mA max. - no load)
<b>Output Voltage:</b>	Low: 500 mV max. at 10 mA High: ( $V_{in} - 0,6$ ) at -10 mA ( $V_{in} - 1,3$ ) at -25 mA
<b>Output Current:</b>	30 mA max. load per output channel **
<b>Frequency Response:</b>	300 kHz max. **
<b>Output Format:</b>	Two channel (A, B) quadrature with Index (Z) and optional complementary (A-, B-, Z-) outputs
<b>Phase Sense:</b>	A leads B clockwise (CW) from the mounting end of the encoder
<b>Index:</b>	Gated with Channels A and B high
<b>Accuracy:</b>	+/- 0,8 arc-min.
<b>Outputs:</b>	ASIC Push pull and Differential OL7272 Push-pull and Differential Line Driver 26C31 Differential Line Driver 5V output (with 5V input)
<b>Electrical Protection:</b>	Reverse polarity and output short circuit protected
<b>Noise Immunity:</b>	Tested to EN61000-6-2 : 2005 (industrial environments) Electromagnetic compatibility (EMC) and EN 61000-6-3 : 2007 (residential, commercial, and light-industrial environments) for Electromagnetic compatibility (EMC)

\*\*= It is recommended user not to combine max. Value for all 3 parameters

### Mechanical Specifications

<b>Material:</b>	Housing: Aluminum Cap: Aluminum Hollow Shaft: Brass
<b>Weight:</b>	Encoder: ~ 120 gr (4,23 oz) Cable: 60 gr / meter (2,12 oz / meter)
<b>Bearing Life:</b>	> $1,9 \times 10^{10}$ revolutions at rated load
<b>Shaft Speed:</b>	12.000 rpm (max.)
<b>Starting Torque:</b>	< 0,01 Nm (1,42 oz-in) at 25° C
<b>Mass Moment of Inertia:</b>	4,0 gcm <sup>2</sup> ( $5,66 \times 10^{-5}$ oz-in-sec <sup>2</sup> )
<b>Hollow Shaft Loads:</b>	Axial: 20 N (4,5 lbs) max. Radial: 20 N (4,5 lbs) max.


### Environmental Specifications

<b>Operating Temp.:</b>	-40° to +85° C
<b>Storage Temp.:</b>	-40° to +85° C
<b>Shock:</b>	100 G / 11 ms
<b>Vibration:</b>	10-2000 Hz / 10 G
<b>Bump:</b>	10 G / 16 ms (1000 x 3 axis)
<b>Humidity:</b>	98 % RH without condensation
<b>IP Rating:</b>	IP 65 / Nema 5 (approx.) IP 66 / Nema 6 (approx.) option IP 67 / Nema 6 (approx.) option

### Connection Options

<b>Cable:</b>	8 leads (0,14 mm <sup>2</sup> , 26 AWG) twisted pairs; shielded
<b>Connector:</b>	5-pin M12 8-pin M12 9-pin M23 12-pin M23

## Output waveform

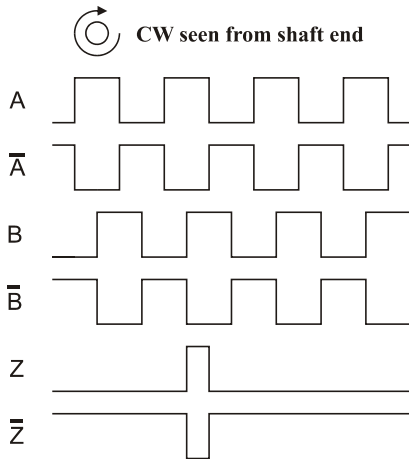

Channel tolerance       $180\text{ e}^\circ \pm 36\text{ e}^\circ$   
 Phase difference tolerance     $90\text{ e}^\circ \pm 18\text{ e}^\circ$   
 Z channel tolerance         $90\text{ e}^\circ \pm 18\text{ e}^\circ$

## Disk Resolutions (Pulses per revolution)



1	32	125	720	3072
2	36	150	800	3600
5	40	180	1000	4000
6	45	200	1024	4096
7	47	250	1131	5000
8	50	256	1200	8192
10	60	300	1250	9000*
12	64	360	1270	10000*
15	70	400	1500	12500*
16	75	455	2000	
18	80	500	2048	
20	90	512	2400	
25	100	600	2500	
30	120	635	3000	

### Other options on request

Pulses per revolution,  
min. 1 – max. 12.500



\* Operating temperature:  $-20^\circ\text{C}$  to  $50^\circ\text{C}$

## Mechanical Dimensions

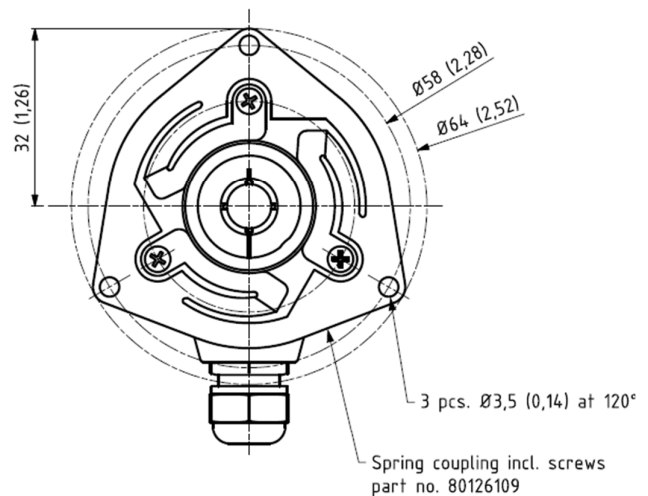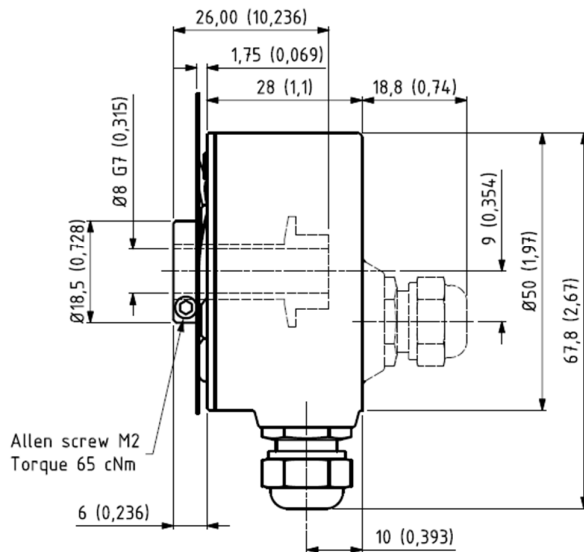



Standard Cable Gland  
Side (S) or Back (B)

mm (inches)

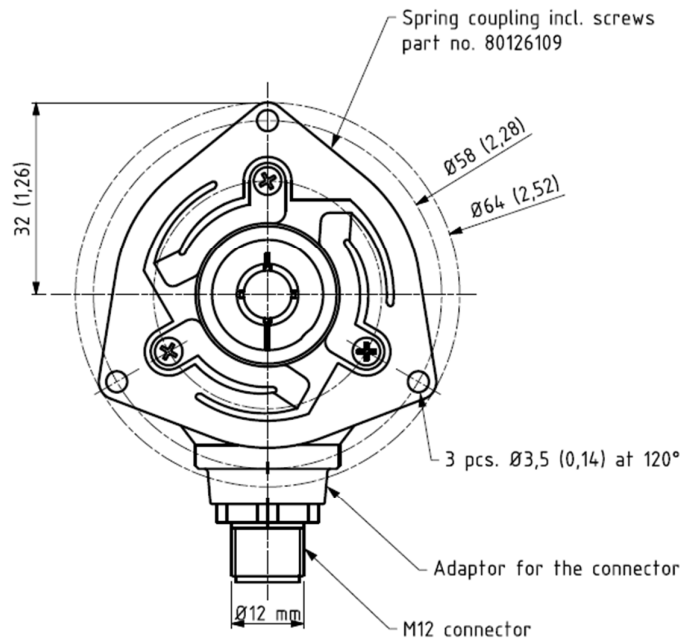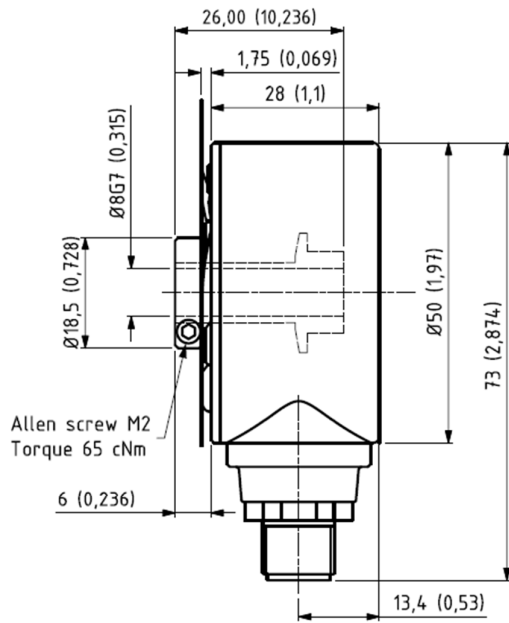

M12 Connector


mm (inches)

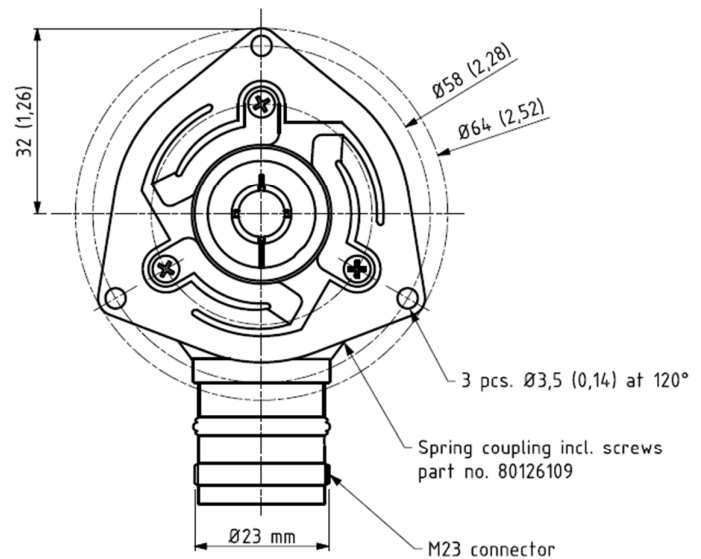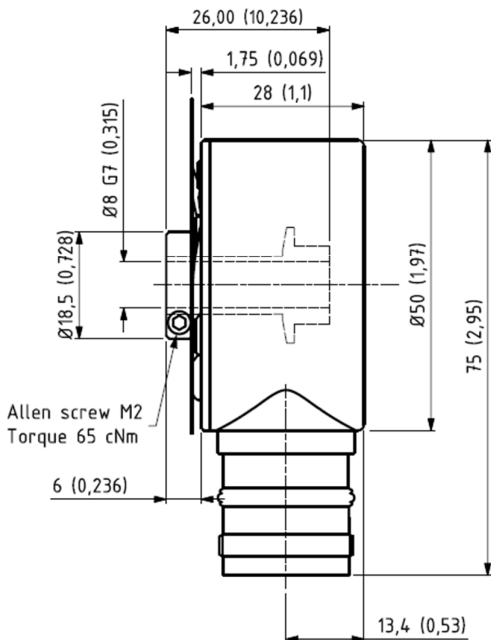

M23 Connector

mm (inches)

## Output Terminations

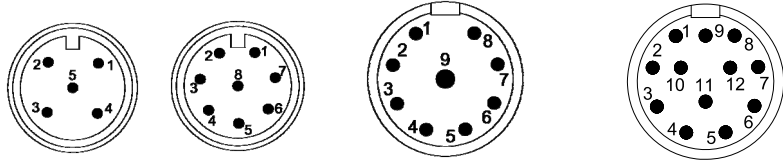

Channel	Standard Cable	
	Standard Output	Differential Output
	Wire Color	
A	Pink	Pink
A -	Gray*	Gray
B	Green	Green
B -	Yellow*	Yellow
Z	White	White
Z -	Brown*	Brown
Vsup	Red	Red
GND	Blue	Blue

*GND = Circuit Ground*

*\* Internally connected as GND*

Pin	M12 5 - pin	M12 8 - pin	M23 9 - pin	M23 9 - pin	M23 12 - pin	M23 12 - pin
	Standard Output	Differential Output	Standard Output	Differential Output	Standard Output	Differential Output
	Channel	Channel	Channel	Channel	Channel	Channel
1	Vsup	A	A	A	GND	B -
2	B	Vsup	B	B	NC	NC
3	GND	A -	Z	Z	Z	Z
4	A	B	GND	A -	GND	Z -
5	Z	B -	GND	B -	A	A
6		Z	GND	Z -	GND	A -
7		GND	Vsup	Vsup	NC	NC
8		Z -	GND	GND	B	B
9			Shield	Shield	Shield	Shield
10					GND	GND
11					NC	NC
12					Vsup	Vsup

*GND = Circuit Ground*

*Shield = Case Ground*

## Ordering Code

Example: SCH50F – 1024 – D – 08 – 26 – 65 – 01 – S – 00 – S1

<b>SCH50F</b>				26					
---------------	--	--	--	----	--	--	--	--	--

<b>Pulses per Revolution</b>	<b>Output</b>	<b>Hollow Shaft Dia.</b>	<b>Hollow Shaft Length</b>	<b>IP Rating</b>	<b>Cable Length</b>	<b>Takeout</b>	<b>Connector</b>	<b>Spring Coupling</b>																																		
See table																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Standard</td><td style="text-align: right;"><b>N</b></td></tr> <tr><td>Standard – Open Collector NPN</td><td style="text-align: right;"><b>NON</b></td></tr> <tr><td>Standard – Open Collector PNP</td><td style="text-align: right;"><b>NOP</b></td></tr> <tr><td>Differential</td><td style="text-align: right;"><b>D</b></td></tr> <tr><td>26C31 Line Driver 5V / 5V only</td><td style="text-align: right;"><b>L</b></td></tr> <tr><td>OL 7272 Line Driver</td><td style="text-align: right;"><b>M</b></td></tr> </table>	Standard	<b>N</b>	Standard – Open Collector NPN	<b>NON</b>	Standard – Open Collector PNP	<b>NOP</b>	Differential	<b>D</b>	26C31 Line Driver 5V / 5V only	<b>L</b>	OL 7272 Line Driver	<b>M</b>				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>IP 65</td><td style="text-align: right;"><b>65</b></td></tr> <tr><td>IP 66*</td><td style="text-align: right;"><b>66</b></td></tr> <tr><td>IP 67*</td><td style="text-align: right;"><b>67</b></td></tr> </table> <p style="font-size: small;">* Encoder total length is 38.2 mm for IP 66 and IP 67 options</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Standard is 1 meter</td><td style="text-align: right;"><b>01</b></td></tr> <tr><td>Specify length</td><td style="text-align: right;"><b>XX</b></td></tr> <tr><td>No Cable</td><td style="text-align: right;"><b>00</b></td></tr> </table>	IP 65	<b>65</b>	IP 66*	<b>66</b>	IP 67*	<b>67</b>	Standard is 1 meter	<b>01</b>	Specify length	<b>XX</b>	No Cable	<b>00</b>														
Standard	<b>N</b>																																									
Standard – Open Collector NPN	<b>NON</b>																																									
Standard – Open Collector PNP	<b>NOP</b>																																									
Differential	<b>D</b>																																									
26C31 Line Driver 5V / 5V only	<b>L</b>																																									
OL 7272 Line Driver	<b>M</b>																																									
IP 65	<b>65</b>																																									
IP 66*	<b>66</b>																																									
IP 67*	<b>67</b>																																									
Standard is 1 meter	<b>01</b>																																									
Specify length	<b>XX</b>																																									
No Cable	<b>00</b>																																									
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="3"><b>IP65</b></td></tr> <tr><td>6 mm x 26 mm</td><td style="text-align: right;"><b>6</b></td><td style="text-align: right;"><b>- 26</b></td></tr> <tr><td>7 mm x 26 mm</td><td style="text-align: right;"><b>7</b></td><td style="text-align: right;"><b>- 26</b></td></tr> <tr><td>8 mm x 26 mm</td><td style="text-align: right;"><b>8</b></td><td style="text-align: right;"><b>- 26</b></td></tr> <tr><td>1/4 in x 26 mm</td><td style="text-align: right;"><b>1/4</b></td><td style="text-align: right;"><b>- 26</b></td></tr> <tr><td colspan="3"><b>IP66/67</b></td></tr> <tr><td>6 mm x 26 mm</td><td style="text-align: right;"><b>6</b></td><td style="text-align: right;"><b>- 26</b></td></tr> </table>	<b>IP65</b>			6 mm x 26 mm	<b>6</b>	<b>- 26</b>	7 mm x 26 mm	<b>7</b>	<b>- 26</b>	8 mm x 26 mm	<b>8</b>	<b>- 26</b>	1/4 in x 26 mm	<b>1/4</b>	<b>- 26</b>	<b>IP66/67</b>			6 mm x 26 mm	<b>6</b>	<b>- 26</b>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="3"><b>Cable</b></td></tr> <tr><td>Side (radial)</td><td style="text-align: right;"><b>S</b></td><td></td></tr> <tr><td>Back (axial)</td><td style="text-align: right;"><b>B</b></td><td></td></tr> <tr><td colspan="3"><b>Connector</b></td></tr> <tr><td>Side (radial)</td><td style="text-align: right;"><b>S</b></td><td></td></tr> </table>	<b>Cable</b>			Side (radial)	<b>S</b>		Back (axial)	<b>B</b>		<b>Connector</b>			Side (radial)	<b>S</b>				
<b>IP65</b>																																										
6 mm x 26 mm	<b>6</b>	<b>- 26</b>																																								
7 mm x 26 mm	<b>7</b>	<b>- 26</b>																																								
8 mm x 26 mm	<b>8</b>	<b>- 26</b>																																								
1/4 in x 26 mm	<b>1/4</b>	<b>- 26</b>																																								
<b>IP66/67</b>																																										
6 mm x 26 mm	<b>6</b>	<b>- 26</b>																																								
<b>Cable</b>																																										
Side (radial)	<b>S</b>																																									
Back (axial)	<b>B</b>																																									
<b>Connector</b>																																										
Side (radial)	<b>S</b>																																									
							<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>M12 5-pin</td><td style="text-align: right;"><b>P5</b></td></tr> <tr><td>M12 8-pin</td><td style="text-align: right;"><b>P8</b></td></tr> <tr><td>M23 9-pin</td><td style="text-align: right;"><b>C9</b></td></tr> <tr><td>M23 12-pin</td><td style="text-align: right;"><b>C12</b></td></tr> <tr><td>No Connector</td><td style="text-align: right;"><b>00</b></td></tr> </table>	M12 5-pin	<b>P5</b>	M12 8-pin	<b>P8</b>	M23 9-pin	<b>C9</b>	M23 12-pin	<b>C12</b>	No Connector	<b>00</b>																									
M12 5-pin	<b>P5</b>																																									
M12 8-pin	<b>P8</b>																																									
M23 9-pin	<b>C9</b>																																									
M23 12-pin	<b>C12</b>																																									
No Connector	<b>00</b>																																									
								<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>1 hole p/n 80146636</td><td style="text-align: right;"><b>S1</b></td></tr> <tr><td>1 hole p/n 80141075</td><td style="text-align: right;"><b>S2</b></td></tr> <tr><td>3 holes p/n 80126109</td><td style="text-align: right;"><b>S3</b></td></tr> <tr><td>1 hole p/n 80140305</td><td style="text-align: right;"><b>S4</b></td></tr> <tr><td>No spring coupling</td><td style="text-align: right;"><b>00</b></td></tr> </table>	1 hole p/n 80146636	<b>S1</b>	1 hole p/n 80141075	<b>S2</b>	3 holes p/n 80126109	<b>S3</b>	1 hole p/n 80140305	<b>S4</b>	No spring coupling	<b>00</b>																								
1 hole p/n 80146636	<b>S1</b>																																									
1 hole p/n 80141075	<b>S2</b>																																									
3 holes p/n 80126109	<b>S3</b>																																									
1 hole p/n 80140305	<b>S4</b>																																									
No spring coupling	<b>00</b>																																									

See accessories for drawings

Other options on request:  
Please contact Scancon A/S